






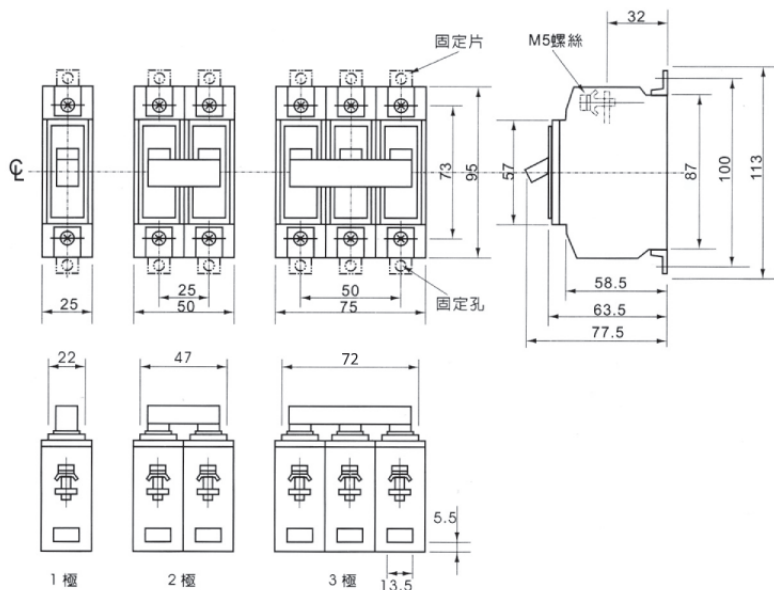
BH型無熔線斷路器（分電盤用）卡式

框架容量 (AF)	50	100			50	100	
型式	BQL				BQS		
外觀							
極數 (P)	1	2	3	1	2		
外型及安裝尺寸 (mm)	a	25	50	75	25	50	
	b	95					
	c	58.5					
	ca	77.5					
	bb	100					
	aa	0	25	50	0	25	
	額定電壓 (V) A.C	110/220	220			110/220	220
額定電流 (A) (基準周圍溫度 40°C)	10,15,20,30,40,50	10,15,20,30,40,50,60,75,100			10,15,20,30,40,50	10,15,20,30,40,50,60,75,100	
啟斷容量 IC:kA	110V	15	—			25/22	25/22
	220V	10	15			—	25/22
	380V	—	10			—	16/15
重量 (kg)	0.18	0.37	0.55	0.18	0.37		

特性曲線 & 外型尺寸

● BQL, BQS SERIES

● 外型尺寸圖



● 過電流操作特性曲線

