



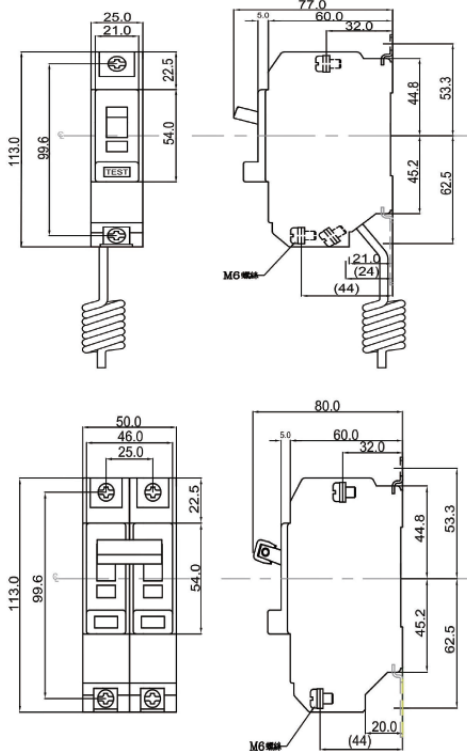


# 漏電斷路器

漏電、過負載、短路保護兼用型		漏電保護專用型			
框架容量 (AF)	50		30		
型 式	EQL51	EQL52	EV32		
外 觀					
相 線 式	1 $\phi$ 2W				
極 數 (P)	1	2	2		
額定電壓 (V) A.C	110/220				
額定電流(A)(基準周圍溫度40°C)	15,20,30,40,50		15,20,30		
額定感度電流 (mA)	30				
動作時間 (秒)	0.1秒內				
額定放斷容量 (kA)	A.C	220V	10	15	1.5 (額定短時間電流)
	A.C	110V	15	15	1.5 (額定短時間電流)
	a	25	50	32	
	b	113	113	70	
	c	60	60	38	
	ca	77	80	52	
	bb	116	116	62	
	aa	—	—	—	
	重量	0.23	0.37	0.11	

- 外型尺寸圖
- EQL 50AF



- EV32

